


# sim. ISO 7049 - DIN 7981 H

## Tapping screws

pan head with cross recess H (Phillips), type C (with cone point)

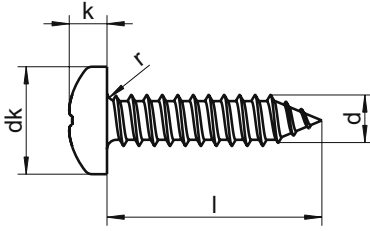

dk	4,2	5,6	6,9	7,5	8,2	9,5	10,8	12,5
k min.	1,55	1,95	2,35	2,55	2,75	3,25	3,65	4,25
k max.	1,80	2,20	2,60	2,80	3,05	3,55	3,95	4,55
r max.	0,3	0,4	0,5	0,5	0,6	0,7	0,8	0,9
⊕	P 1	P 1	P 2	P 2	P 2	P 2	P 3	P 3
Length / Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
4,5 (1/6")	▲●							
6,5 (1/4")	▲●							
9,5 (3/8")	▲●	▲●			▲●			
13 (1/2")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
16 (5/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
19 (3/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22 (7/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
25 (1")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
32 (1 1/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
38 (1 1/2")		▲●	▲●	▲●	▲●	▲●	▲●	▲●
45 (1 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
50 (2")			▲●	▲●	▲●	▲●	▲●	▲●
55 (2 1/8")			▲●	▲●	▲●	▲●	▲●	▲●
60 (2 3/8")			▲●	▲●	▲●	▲●	▲●	▲●
70 (2 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
80 (3 1/8")				▲●	▲●	▲●	▲●	▲●
90 (3 1/2")					▲●	▲●	▲●	▲●
100 (4")					▲●	▲●	▲●	▲●
120 (4 3/4")						▲●	▲●	▲●
SU	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	1000 ≥ 22 500 ≥ 32 200	500 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request.

Example item no. 7981-2-4,2X38 DIN 7981 - A2 - Ø 4,2mm - l = 38mm - phillips drive

Tapping screws with pan head DIN 7981 with cutting groove type SB are available on request. Tapping screws with pan head DIN 7981 with different coatings or head varnishing are available on request. Tapping screws with pan head and TX can be found as WS 9477, security screws with TX+PIN as WS 9485 in this catalogue.