



DIN 966 H - sim. ISO 7047

Raised countersunk head screws

with cross recess H (Phillips)

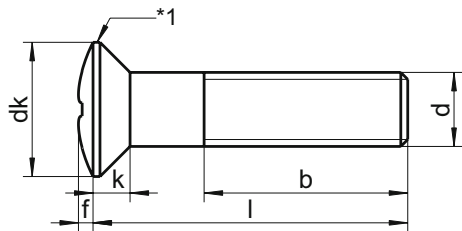

dk	4,7	5,6	7,5	9,2	11,0	14,5	18,0
f	0,60	0,75	1,00	1,25	1,50	2,00	2,50
k	1,50	1,65	2,20	2,50	3,00	4,00	5,00
b min.	18	19	22	25	28	34	40
⊕	P 1	P 1	P 2	P 2	P 3	P 4	P 4
Length / Ø	M2,5	M3	M4	M5	M6	M8	M10
4	▲ ●	▲ ●					
5	▲ ●	▲ ●	▲ ●				
6	▲ ●	▲ ●	▲ ●	▲ ●			
8	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
10	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
12	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
14	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
18	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
20	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
28		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
30		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
65			▲ ●	▲ ●	▲ ●	▲ ●	
70			▲ ●	▲ ●	▲ ●	▲ ●	
75				▲ ●	▲ ●	▲ ●	
80				▲ ●	▲ ●	▲ ●	
85				▲ ●	▲ ●	▲ ●	
90				▲ ●	▲ ●	▲ ●	
95				▲ ●	▲ ●	▲ ●	
100				▲ ●	▲ ●	▲ ●	
SU	1000	1000 ≥ 25 500	1000 ≥ 25 500	500 ≥ 25 200	200 ≥ 35 100	100	100

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 966-2-8X40 DIN 966 - A2 - M8 - l = 40mm - phillips drive - *1 head with rounded or flatended edge